




CABLE TRUNKINGS

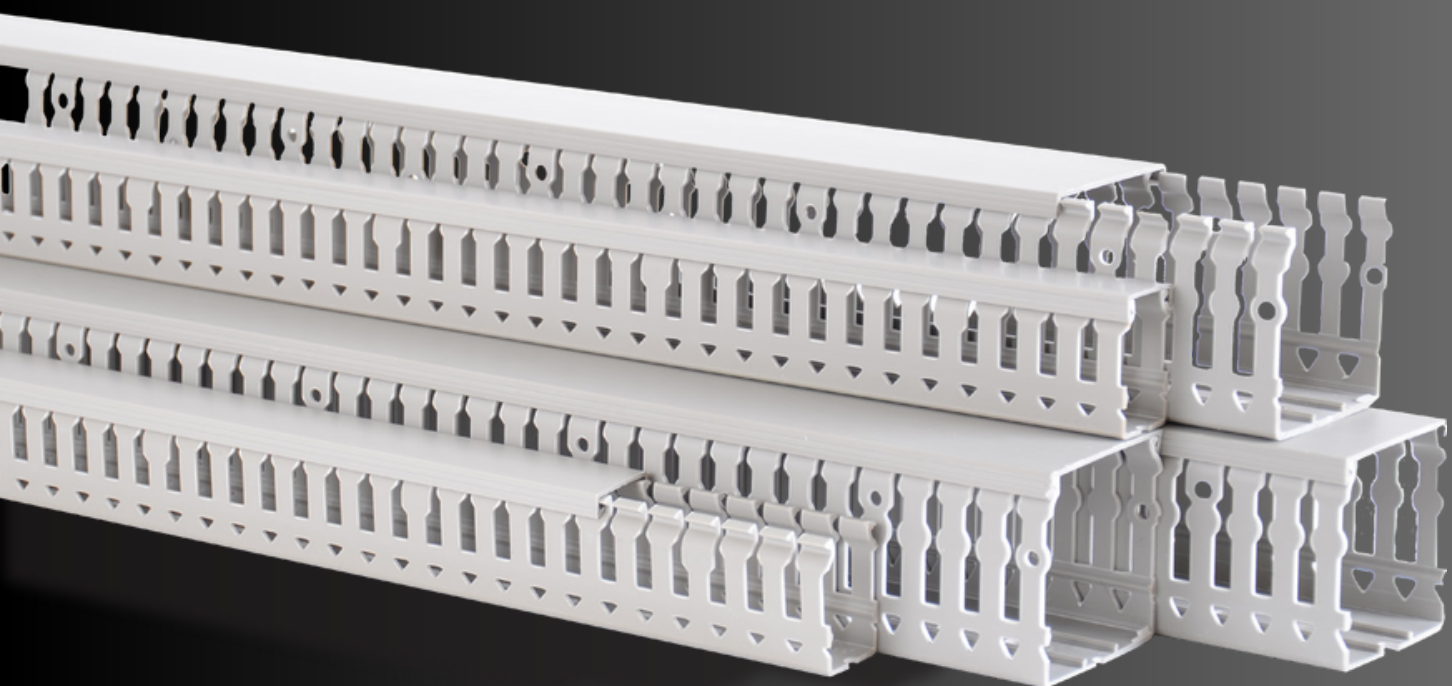

NAIL WIDTH 6mm (0.236 inch)

With its wide spacing, it enables a much more robust cable management, resolving the issue of tight spaces during cable routing. Furthermore, it eliminates the uncontrolled cable swing resulting from the breaking of multiple clips when using multiple cables. In this regard, it offers a significantly more efficient solution compared to its counterparts.

SIDE WALL HOLE DESIGN

The hole design on the side walls facilitates the use of cable ties, providing convenience in cable management.

The lines on the bottom, base, and side walls.

It enables seamless and burr-free integration when joining 90-degree channel corners. As a result, your panels will have a more elegant and rigid appearance.

NAIL BREKAGE





There are nail lines that allow easy and tool-free breaking of the desired clips at a 90-degree angle. This way, you can achieve a neat and burr-free appearance.

NAIL HOLE DESIGN

Thanks to the circular hole design on the clip, you can route your signal cables separately from other cables in the channel.

RAL-7030

It is compliant with international standards.

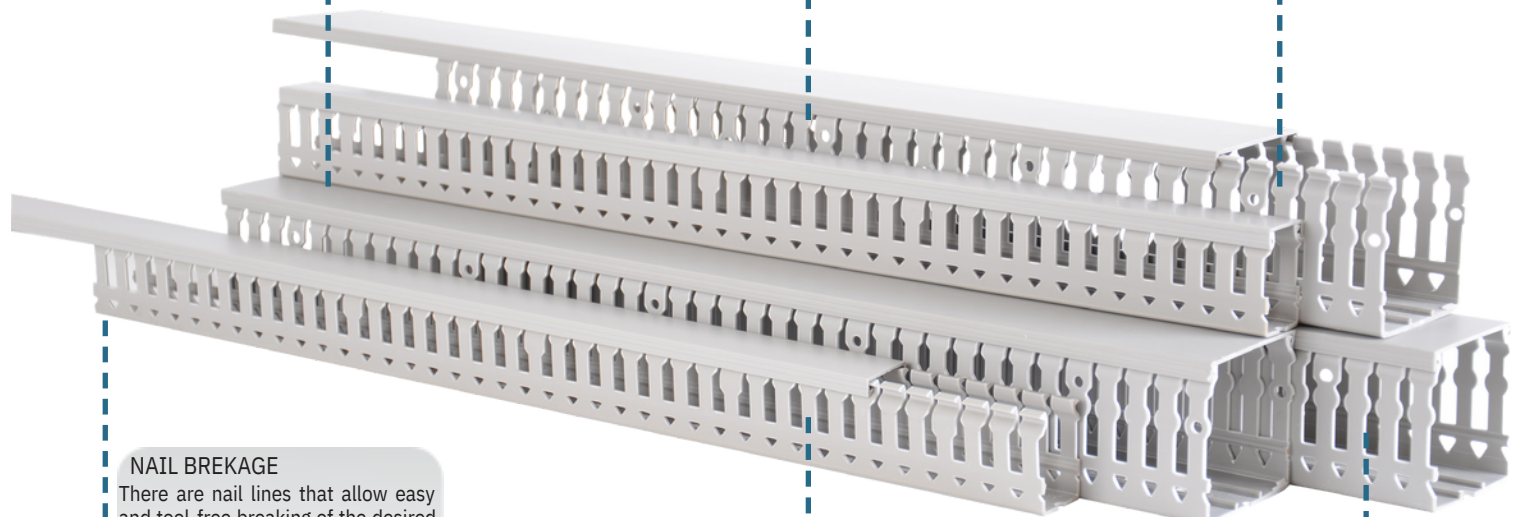

1 Nail Width – 6 mm (0.236 Inch)



Due to the cable channel's 6mm nail widths, a single nail breakage will be sufficient for the passage of multiple or thicker cables through the gaps. This way, you can prevent cables from swinging between the nails by avoiding multiple nail breakages.

2 Bottom Base Lines



The "bottom base lines" are designed for the breakage of the side walls.

3 Elegant and Robust Design



It enables not only a rigid appearance in your panels but also facilitates secure connections.

4 Side Wall Lines



It provides a burr-free breaking of the nail structure.

5 Nail Hole Design




With the hole design under the clip, it facilitates the use of cable ties.

6 Compliance with International Standards



It complies with international standards RAL 7030, UL 94-V0, IEC60695-2-1, and EN50085-2-3.



CABLE TRUNKING

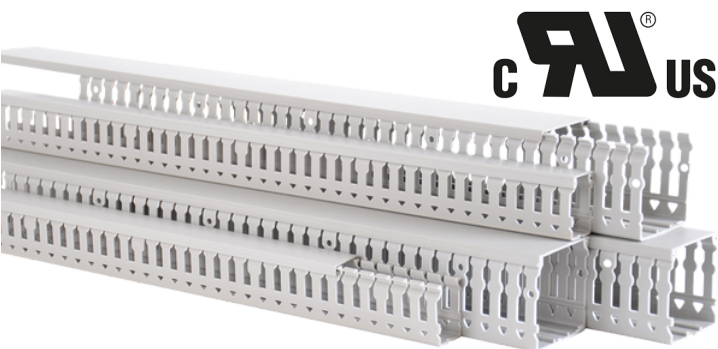

CABLE TRUNKING		
Product Code	Inch Size	Box Qty. / mt.
OCT2540G	0.98 x 1.57	100
OCT2560G	0.98 x 2.36	60
OCT2580G	0.98 x 3.15	56
OCT4040G	1.57 x 1.57	52
OCT4060G	1.57 x 2.36	36
OCT4080G	1.57 x 3.15	40
OCT4010G	1.57 x 3.94	28
OCT6040G	2.36 x 1.57	36
OCT6060G	2.36 x 2.36	24
OCT6080G	2.36 x 3.15	24
OCT6010G	2.36 x 3.94	36
OCT8040G	3.15 x 1.57	36
OCT8060G	3.15 x 2.36	28
OCT8080G	3.15 x 3.15	20
OCT8010G	3.15 x 3.94	24
OCT1060G	3.94 x 2.36	20
OCT1080G	3.94 x 3.15	16
OCT1010G	3.94 x 3.94	24



CABLE TRUNKING COVER				
Product Code	Size (Inch) mm		Colour	Box Qty. / mt.
OCTC 250	(0.98)	25	RAL7030 Grey	10x2
OCTC 400	(1.57)	40	RAL7030 Grey	10x3
OCTC 600	(2.36)	60	RAL7030 Grey	10x4
OCTC 800	(3.15)	80	RAL7030 Grey	10x5
OCTC 1000	(3.93)	100	RAL7030 Grey	10x6

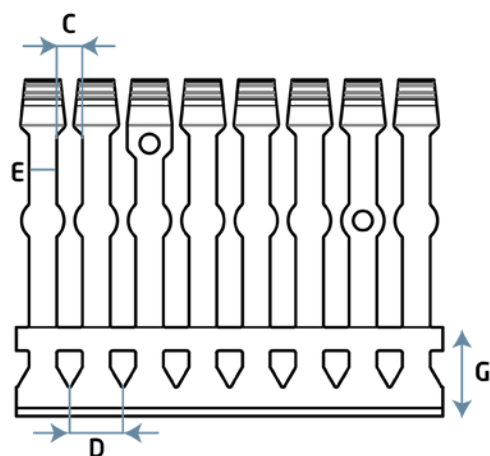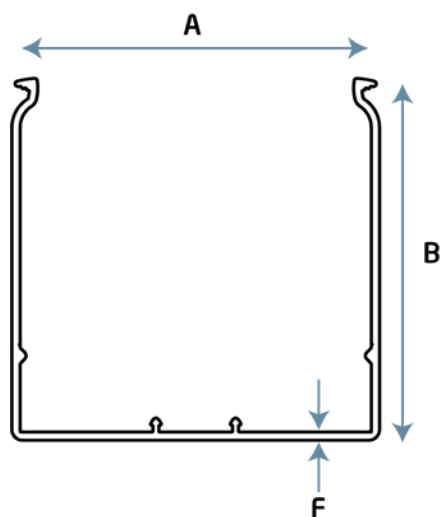

	DIMENSIONS (inch)						
Size	A	B	C	D	E	F	G
25x40	0.98	1.52	0.24	0.49	0.24	0.05	0.53
25x60	0.98	2.31	0.24	0.49	0.24	0.06	0.68
25x80	0.98	3.10	0.24	0.49	0.24	0.07	0.65
40x40	1.57	1.52	0.24	0.49	0.24	0.05	0.59
40x60	1.57	2.31	0.24	0.49	0.24	0.06	0.61
40x80	1.57	3.10	0.24	0.49	0.24	0.07	0.75
40x100	1.57	3.89	0.24	0.49	0.24	0.07	0.82
60x40	2.36	1.52	0.24	0.49	0.24	0.06	0.53
60x60	2.36	2.31	0.24	0.49	0.24	0.07	0.69
60x80	2.36	3.10	0.24	0.49	0.24	0.07	0.75
60x100	2.36	3.89	0.24	0.49	0.24	0.08	0.83
80x40	3.15	1.54	0.24	0.49	0.24	0.07	0.60
80x60	3.15	2.32	0.24	0.49	0.24	0.07	0.69
80x80	3.15	3.10	0.24	0.49	0.24	0.07	0.82
80x100	3.15	3.11	0.24	0.49	0.24	0.09	0.83
100x60	3.94	3.32	0.24	0.49	0.24	0.08	0.69
100x80	3.94	3.11	0.24	0.49	0.24	0.05	0.83
100x100	3.94	3.90	0.24	0.49	0.24	0.05	0.83